



**MODELS 60<sup>®</sup>, 64<sup>®</sup> & 66<sup>™</sup>**

**UNDERGROUND WIRE CONNECTORS**

**FEATURES/BENEFITS:**



- PRE-FILLED TWIST-ON WIRE CONNECTORS PROVIDE ONE-STEP PROCESS
- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE & CORROSION IN WET LOCATION APPLICATIONS
- LISTED TO UL 486G SEALED TWIST-ON WIRE CONNECTOR
- FOR USE IN DAMP/WET LOCATIONS OR DIRECT BURIAL/BELOW-GRADE APPLICATIONS

**ELECTRICAL:**

|                                |                       |
|--------------------------------|-----------------------|
| VOLTAGE: MODEL 60 <sup>®</sup> | 600 V MAX*            |
| MODEL 64 <sup>®</sup>          | 600 V MAX*            |
| MODEL 66 <sup>®</sup>          | 600 V MAX*            |
|                                | *SIGNS/FIXTURES 1000V |

**PHYSICAL:**

|              |                         |
|--------------|-------------------------|
| HOUSING:     | THERMOPLASTIC POLYESTER |
| INSERT:      | STEEL                   |
| PLATING:     | ZINC                    |
| TEMPERATURE: | 105 C (221 F)           |
| SEALANT      | 100% SILICONE           |

**STANDARDS & SPECIFICATIONS:**

UL 486C  
 UL 486G SEALED TWIST-ON WIRE CONNECTOR  
 UL 94V-2 FLAME RATING  
 CSA- C22.2 NO. 188  
 CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL  
 RoHS COMPLIANT



**WIRE RANGE:** - Solid and/or stranded wire combinations unless stated otherwise  
 - Consult factory for numerous other combinations not listed

| MODEL 60 <sup>®</sup>  | MODEL 64 <sup>®</sup>  | MODEL 66 <sup>™</sup>  |
|--|--|--|
| STRIP LENGTH: 1/2" (12,7mm)  | STRIP LENGTH: 5/8" (15,9mm)  | STRIP LENGTH: 1" (25,4mm)  |
| 1 to 2 #10<br>1 to 3 #12<br>1 to 4 #14<br>2 #16<br>2 #18<br>1 #10 w/ 2 #12<br>1 #20 w/ 1 #18 | 1 to 3 #10<br>1 to 3 #12<br>2 to 5 #14<br>2 to 4 #16<br>2 to 4 #18 solid<br>3 or 4 #20 solid<br>3 or 4 #22 solid | 1 to 2 #6<br>2 to 3 #8<br>2 to 5 #10<br>3 to 6 #12<br>1 #6 w/ 1 to 2 #8<br>2 #6 w/ 1 #10 or 1 #12 or 1 #14<br>2 #8 w/ 1 or 2 #10 |

**DIMENSIONS:**

Length = 1.68 in (42,7 mm)  
 Diameter = 0.65 in (16,5 mm)  
 Wingspan = 0.85 in (21,7 mm)

MODEL 60<sup>®</sup> IMAGE NOT AVAILABLE

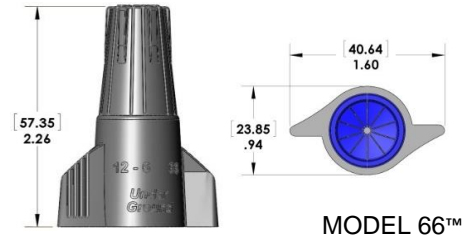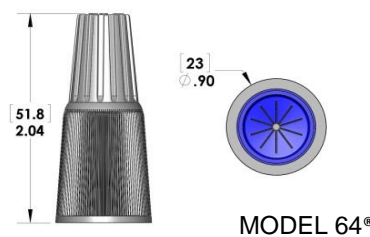

**ORDERING INFO:**

| CATALOG # | MODEL           | COLOR         | PACKAGE TYPE: | WEIGHT LBS (KG): |
|-----------|-----------------|---------------|---------------|------------------|
| 30-1260   | 60 <sup>®</sup> | Gray/Gray     | Box of 100    | 14.4 (6.5)       |
| 30-1264   | 64 <sup>®</sup> | Gray/Dk. Blue | Box of 50     | 34.1 (15.5)      |
| 30-1066   | 66 <sup>™</sup> | Gray/Dk. Blue | Box of 50     | 5.5 (2.5)        |

**FACTORY CONTACT:**

IDEAL INDUSTRIES, INC.  
 BECKER PLACE SYCAMORE IL  
 USA 60178  
 P: 1-800-435-0705  
 F: 1-888-222-6140  
 E: [contactus@idealindustries.com](mailto:contactus@idealindustries.com)

**SALES CONTACT:**